



# BALL VALVE - 24V DCA

2 POSITION / FLOATING SIEMENS DAMPER ELECTRIC ACTUATORS  
 1/2" - 2" BRASS BODY, 3-WAY BALL VALVES

## 3-WAY BALL VALVES

**BODY RATING:** ANSI 250/600 WOG  
**STATIC PRESSURE:** 360 psi  
**CLOSE-OFF PRESSURE:** 200 psi  
**BODY:** FORGED BRASS ASTM B283  
**END CONNECTIONS:** FEMALE NPT  
**BALL:** CHROME-PLATED BRASS OR STAINLESS STEEL  
**STEM:** BRASS OR STAINLESS STEEL  
**BALL SEALS:** REINFORCED PTFE SEALS  
 WITH EPDM O-RINGS  
**FLOW CHARACTERISTIC:** EQUAL PERCENTAGE  
**FLOW CHARACTERIZER:** GLASS FILLED PTFE  
**LEAKAGE RATE:** CLASS IV  
**CONTROLLED MEDIUM:** WATER,  
 50% WATER-GLYCOL SOLUTIONS  
**MEDIUM TEMP RANGE:** 35°F to 250°F (-7°C to 120°C)  
**1 1/2" to 2":** 35°F to 230°F (-7°C to 110°C)

## DAMPER ACTUATORS

### NEMA 2 PROTECTION

**POWER SUPPLY:** 24VAC ± 20% 50/60Hz  
 24VDC ± 10%

**TEMPERATURE RANGE:** -5°F to +125°F

**RUNTIME:** 75 to 150 sec

### POWER CONSUMPTION

**GDE131.1P:** 2.3VA

**GMA121.1P:** 5VA / 3.5W

**GLB131.1P:** 3VA

### POWER CONNECTION

1/2" CONDUIT TO 3' CABLE (18 GA)



VALVE INFORMATION			NON-SPRING RETURN		SPRING RETURN
SIZE	MODEL #	Cv	GDE131.1P	GLB131.1P	GMA121.1P
0.5"	599-10350(S)	0.4			
	599-10351(S)	0.63			
	599-10352(S)	1.0			
	599-10353(S)	1.6			
	599-10354(S)	2.5			
	599-10355(S)	4			
	599-10356(S)	6.3			
	599-10357(S)*	10			
0.75"	599-10358(S)	6.3			
	599-10359(S)	10			
	599-10360(S)*	16			
1"	599-10361(S)	10			
	599-10362(S)	16			
	599-10363(S)*	25			
1.25"	599-10364(S)	16			
	599-10365(S)	25			
	599-10366(S)*	40			
1.5"	599-10367(S)	25			
	599-10368(S)	40			
	599-10369(S)*	63			
2"	599-10370(S)	40			
	599-10371(S)	63			
	599-10372(S)	100			


\* DENOTES A FULL PORT VALVE WITHOUT FLOW OPTIMIZER INSERT.  
 (S) DENOTES A STAINLESS STEEL BALL AND TRIM



# BALL VALVE - 24V DCA

2 POSITION / FLOATING SIEMENS DAMPER ELECTRIC ACTUATORS

1/2" - 2" BRASS BODY, 3-WAY BALL VALVES

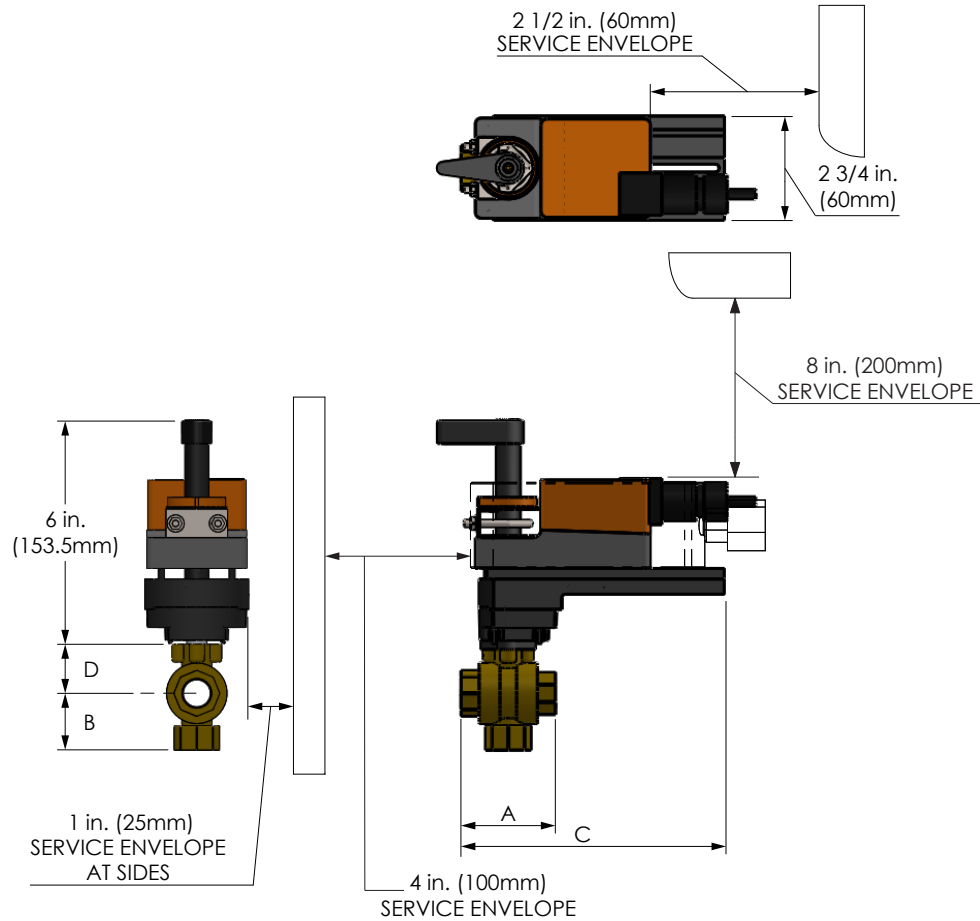

## Dimensions

VALVE SIZE	MODEL	A	B	C	D
1/2" (15)	599-10350(S) through 599-10357(S)	2 9/16 (65)	1 3/8 (35)	7 (178)	1 1/2 (38)
3/4" (20)	599-10358(S)	2 3/4 (70)	1 3/8 (35)	7 (178)	1 1/2 (38)
	599-10359(S) 599-10360(S)	3 1/8 (79)	1 11/16 (43)	7 3/16 (183)	
1" (25)	599-10361(S)	3 1/4 (83)	1 11/16 (43)	7 1/4 (185)	2 (50)
	599-10362(S) 599-10363(S)	3 13/16 (77)	2 (51)		2 1/4 (57)
	599-10364(S) 599-10365(S)	3 5/8 (92)	2 1/8 (54)		7 7/16 (189)
1 1/4" (30)	599-10366(S)	3 15/16 (100)	2 5/16 (59)	7 5/8 (193)	
1 1/2" (40)	599-10367(S)	3 15/16	2 5/16	7 5/8	2 1/4
	599-10368(S)	(100)	(59)	(193)	(57)
	599-10369(S)	4 5/8 (117)	2 13/16 (71)	8 (202)	2 11/16 (69)
2" (50)	599-10370(S)	4 5/8 (117)	2 7/8	8 (202)	2 11/16 (69)
	599-10371(S)		(73)		4
	599-10372(S)				(101)

Inch (mm)